


DumpKiller

Latest IT Exam Questions & Answers

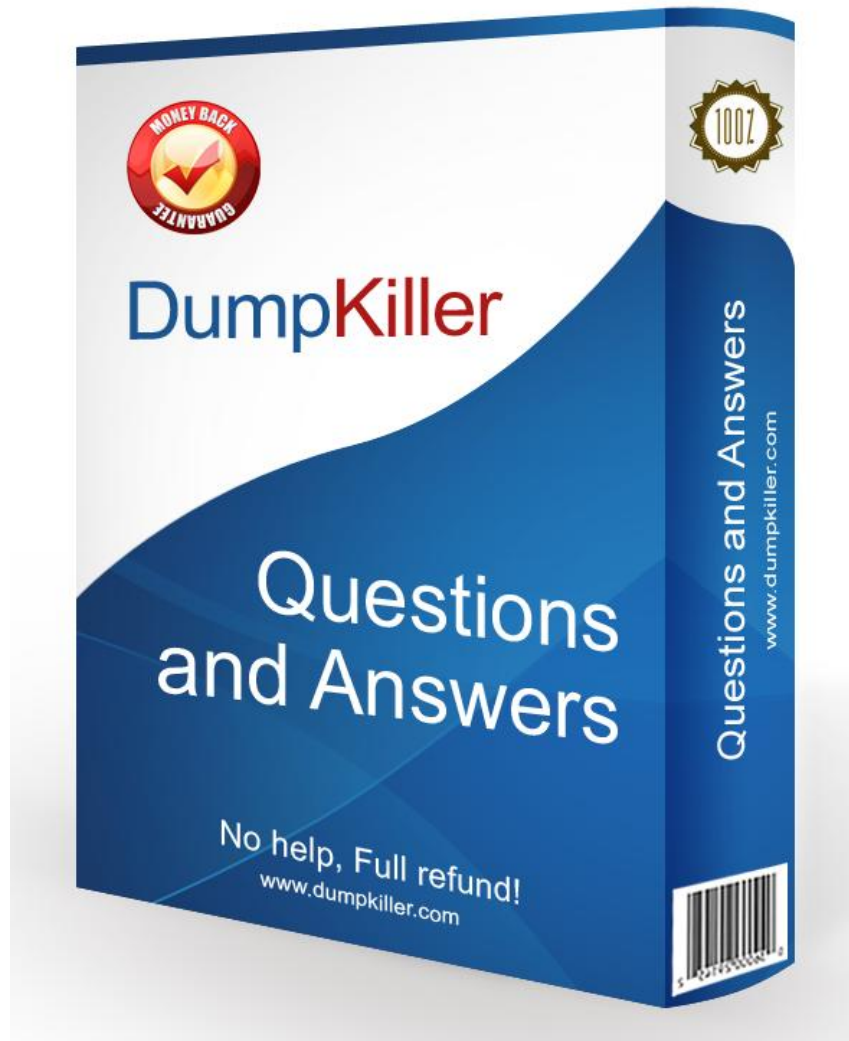

<http://www.dumpkiller.com>

No help, Full refund!

Exam : **600-212**

Title : Implementing Cisco Service
Provider Mobility LTE
Networks (SPLTE)

Vendor : Cisco

Version : DEMO

NO.1 Which capability does trace logging on the Cisco ASR 5000 enable the operator to do?

- A. enables debug-level temporary logging filters based on call ID, IP address, MSID, or username
- B. enables logging for all management messages based on call ID, IP address, MSID, or username
- C. enables syslog facility logging for debug-level messages related to call management messaging
- D. enables informational-level syslog facility logging for call management messaging

Answer: A

NO.2 Which three options are charging characteristic selection modes for S-GW/P-GW? (Choose three.)

- A. home default
- B. visiting default
- C. APN specific
- D. roaming default
- E. subscription specific
- F. serving node specific

Answer: A,B,D

NO.3 Which two IEs are ignored by the LTE domain when the EPS QoS parameter is mapped to the R99 QoS parameter? (Choose two.)

- A. pre-emption capability
- B. ARP priority
- C. MBR of PDP context associated with the background traffic class
- D. MBR of PDP context associated with the interactive traffic class
- E. pre-emption vulnerability

Answer: A,E

NO.4 Which 3GPP specification describes charging management, charging architecture, and principles?

- A. 3GPP-TS-32.240
- B. 3GPP-TS-32.295
- C. 3GPP-TS-32.297
- D. 3GPP-TS-32.299

Answer: A

NO.5 Which option describes the function of ENUM in Voice over LTE?

- A. It converts SIP URI to Telco URI.
- B. It is used for the call forwarding service.
- C. It assigns a telephone number to an IMS UE.
- D. It generates a query in the e164.arpa domain.

Answer: D

NO.6 DRAG DROP

Drag the reference point interface on the left that correctly matches and completes the network element connection on the right.	
S12	eNodeB---(add here)---MME
S4	SGSN---(add here)---MME
S3	SGSN---(add here)---SGW
S1	RNC---(add here)---SGW

Answer:

Drag the reference point interface on the left that correctly matches and completes the network element connection on the right.	
S12	S1
S4	S3
S3	S4
S1	S12

NO.7 Which description of TACACS+ administrator authentication and authorization on the Cisco ASR 5000 is true?

- A. The Cisco ASR 5000 uses a privilege-level attribute value pair to restrict users to command sets that correspond to their assigned administrative role.
- B. The Cisco ASR 5000 uses a privilege-level information element to restrict users to command sets that correspond to their assigned administrative role.
- C. The Cisco ASR 5000 uses an administrator-level attribute value pair to restrict users to command sets that correspond to their assigned administrative role.
- D. The Cisco ASR 5000 uses an administrator-level information element to restrict users to command sets that correspond to their assigned administrative role.

Answer: A

NO.8 Which option describes the flow of the S6a configuration on the Cisco ASR 5000 system?

- A. MME-service, hss-peer-service, diameter endpoint, peer configuration
- B. MME-service, diameter endpoint, hss-peer-service, peer configuration
- C. MME-service, diameter endpoint, S6a-service, peer configuration
- D. s6a-service, hss-peer-service, diameter endpoint, peer configuration

Answer: A